



SPHERICAL ROLLER BEARINGS

An unrivalled extensive product range!



www.ntn-snr.com




With You


ULTAGE™

Spherical roller bearings are engineered to **offer excellent resistance to high temperatures and loads**, meaning that they are capable of withstanding the harshest applications. They are a popular choice for absorbing misalignments, impacts and vibrations, as well as operating in polluted environments.

LESS DOWNTIME, MORE PROFIT!

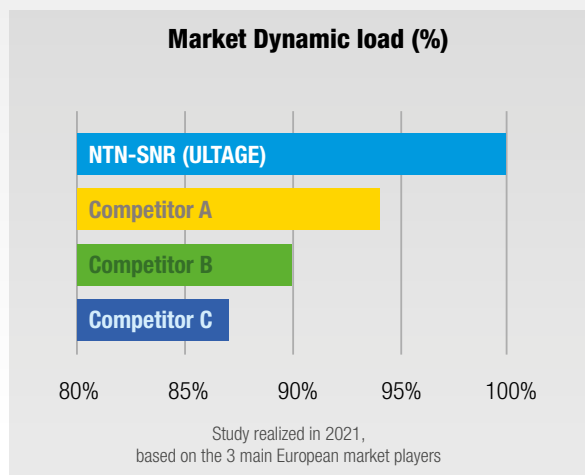


Load capacity




Service life



Speed limits

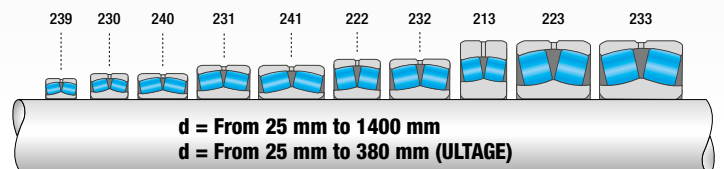

ULTAGE EM DESIGN - MASSIVE BRASS CAGE

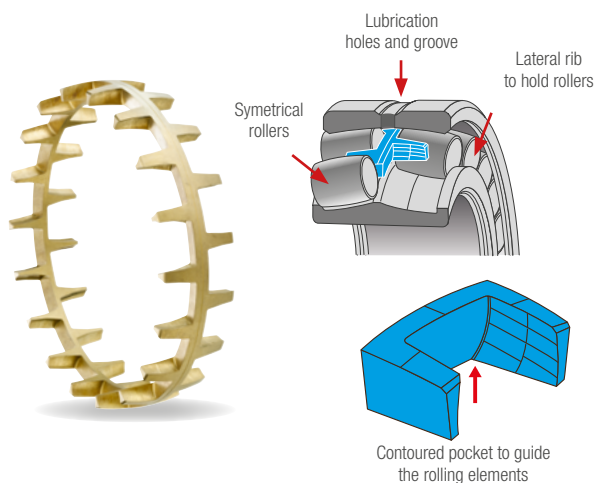

**NTN-SNR also offers other cages in its spherical offer: steel and polyamide (the last one upon request)*

No floating guiding ring nor fixed central rib

- Improved lubrication
- Decreased friction
- Reduced operating temperature

Enveloping cage centered on rollers

- Excellent rollers stability under heavy load
- Reduction of heat generation
- No seizure risk linked to thermal expansion

Single piece brass cage

- Excellent resistance to shock and vibration
- Self-lubricating property, decreasing friction with rollers
- Increased speed

Optimised curvature ratio

- Reduced contact pressure
- Longer service life
- Lower maintenance costs

DEDICATED PRODUCTS EF800 SERIES FOR HIGH-VIBRATION APPLICATIONS

The **EF800 series** is equipped with a solid brass cage and is particularly recommended for use in heavy-duty **applications and vibration systems** (shaker screens, crushers, grinders...).

BENEFITS

- Increased service life
- Wider maintenance intervals
- Greater operational profitability

Optimize the efficiency of your screens!

CHARACTERISTICS

Massive brass cage


- ULTAGE bearing with symmetrical rollers and machined brass alloy one-piece cage centred on the rolling elements.
- No floating guide ring or fixed central shoulder section to avoid any risk of a cage/ring seizure in the event of thermal expansion. The self-lubricating properties of the material help to limit heat build-up at high speeds.

Specific dimensional tolerances

- Specific tolerances for the outer diameter and bore: reduced for the outer diameters and for cylindrical / tapered bores compared with the tolerance ranges of the standard series, guaranteeing a perfect fit of the ring.

Reduced internal radial clearance


- The C4 internal clearance of the EF800 series is reduced to 2/3 of the standard C4 internal clearance in order to obtain improved running properties during operation.



Clearance	22320*		Clearance in microns												
	Min	Max	130	135	140	145	150	155	160	165	170	175	180	185	
C4	135	180													
EF800	150	180													

*Cylindrical bore

EF800 series = C4 with reduced tolerance



48 par numbers available
d = from 40 mm to 200 mm
Further dimensions are possible upon request



This document is the exclusive property of NTN-SNR ROULEMENTS. Any total or partial reproduction hereof without the prior consent of NTN-SNR ROULEMENTS is strictly prohibited. Legal action may be brought against anyone breaching the terms of this paragraph. NTN-SNR ROULEMENTS shall not be held liable for any errors or omissions that may have crept into this document despite the care taken in drafting it. Due to our policy of continuous research and development, we reserve the right to make changes without notice to all or part of the products and specifications mentioned in this document.
© NTN-SNR ROULEMENTS, international copyright 2021.

More informations on: www.ntn-snr.com

