TUBE TYPE SENSOR **PSEUDO - ABSOLUTE**

ROBUST

• Heavy and harsh environments

• Designed for industrial applications



The perfect innovation for a better production

FOR MASS PRODUCTION

\ □

www.ntn-snr.com

With You

MEASURE SPEED & POSITION IN INDUSTRIAL APPLICATIONS


CUSTOM RESOLUTION

- Incremental or Pseudo-Absolute
- Polar adaptation and interpolation

PSEUDO-ABSOLUTE

COMPACT & MODULAR

- Easy integration
- Easy maintenance

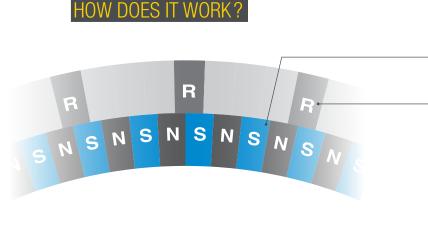

Dual track reading:

Incremental magnetic track

+

Reference pulse track


Additional information

Application:

- End position
- Motor control
- Referenced absolute positioning



CONFIGURATION

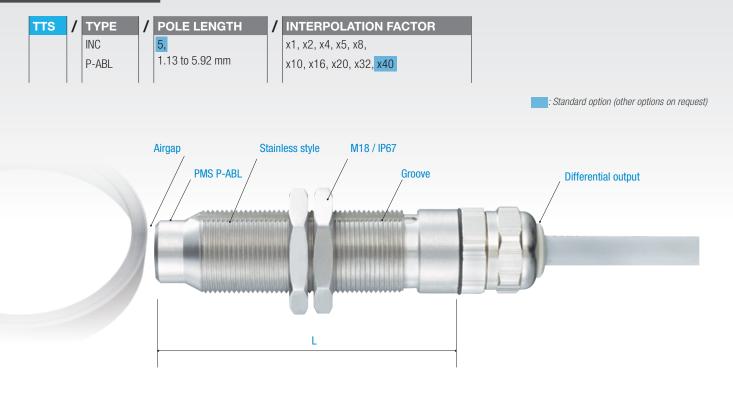

SPECIFICATION

PERFORMANCES

- Power supply: 5V +/- 0,5V
- Frequency: 5kHz max
- Signal output: A and B quadrature outputs, push-pull

ENVIRONMENT

- Operating temperature: -35°C to 105°C
- Vibration 20G IEC68-2
- Shocks 500G
- DIN EN837
- Ingress Protection : IP67

ELECTRICAL PROTECTION

- Reverse polarity
- Protected against short circuit for supply and ouputs

This document is the exclusive property of NTN-SNR ROULEMENTS. Any total or partial reproduction hereof without the prior consent of NTN-SNR ROULEMENTS is strictly prohibited. Legal action may be brought against anyone breaching the terms of this paragraph.

NTN-SNR ROLLEMENTS shall not be held liable for any errors or omissions that may have crept into this document despite the care taken in dratting it. Due to our policy of continuous research and development, we reserve the right to make changes without notice to all or part of the products and specifications mentioned in this document. © NIN-SNR ROLLEMENTS, international copyright 2018.

NTN-SNR ROULEMENTS - 1 rue des usines - 74000 Annecy RCS ANNECY B 325 821 072 - Code APE 2815Z - Code NACE 28.15 www.ntn-snr.com





