

A MUST FOR MOUNTING /  
DISMOUNTING BEARINGS  
**HYDRAULIC NUT**

HMV series



[www.ntn-snr.com](http://www.ntn-snr.com)



With You

Experts  
& Tools



**WITH THE NTN-SNR HYDRAULIC NUT,**  
THE PERFECT TOOL FOR ASSEMBLING OR  
DISASSEMBLING TAPERED BORE BEARINGS

**ADVANTAGES:**

- Simple and secured assembly
- Precise and reliable adjustment of radial bearing clearance
- Reduced assembly times

# TECHNICAL FEATURES OF THE NTN-SNR HYDRAULIC NUT


## Special features:

- Automatic piston return function given to springs inside the nut
- Hydraulic oil returns easily into the pump
- No need for laborious pushing of piston back into its initial position
- Safe handling due to knurled housing surface
- Two hydraulic connections for comfortable access (axial or radial) depending on access in the mounting position

**SAFE:** Built in "emergency-stop" to avoid the piston coming out of the ring-body.

- The NTN-SNR hydraulic nuts are available either with metric threads, HMV...EBF (M50x1.5 → Tr1000x8) or inch threads HMVC...EBF (1.967 → 37.410 in)

If you need special sizes or customized configurations for your specific requirements, please contact us.

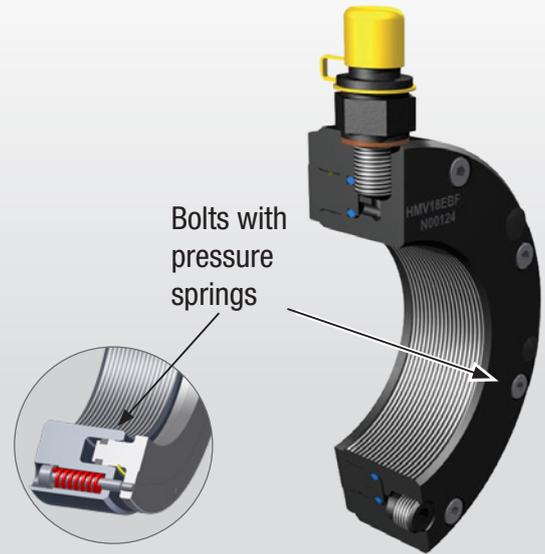

## ACCESSORIES to be used with your hydraulic nut



- TOOL DIAL GAUGE 050
- TOOL DIAL GAUGE 100  
Gauge 5 mm / 10 mm
- TOOL DIAL EXTENSION SET  
Extension adapter for gauge

## TOOLS TO BE USED WITH YOUR HYDRAULIC NUT

### TOOL PUMP SET

Advantages:

- Light and compact design
- Robust packaging
- Ergonomics: lever locking for easy transport
- Robustness: pump with lifetime guarantee (under normal working conditions)
- Efficiency: time saving and reduced pump force due to the twin-stage system (80% fewer pump strokes than with mono-stage pumps)
- Safety for the user: electrically insulated lever and safety valve
- 3 sizes of pump available
  - 0.3 litres for nuts ≤ HMV 54 EBF
  - 0.9 litres for nuts ≤ HMV 92 EBF
  - 2.55 litres for nuts > HMV 92 EBF



### AVAILABLE PUMP SIZES

- TOOL PUMP SET 700B-0.3L  
0.3 l oil capacity / Max. working pressure 700 bar
- TOOL PUMP SET 700B-0.9L  
0.9 l oil capacity / Max. working pressure 700 bar
- TOOL PUMP GAUGE 700  
Gauge indicates max. 700 bar (analogue)
- TOOL HYDRAULIC OIL 1L  
Hydraulic fluid 1.0 l

All hydraulic pumps are supplied with hydraulic hose, connector nipple and a pressure gauge and are ready-filled to max. capacity with oil.



### TO CHECK BEARING CLEARANCE

- TOOL FEELER GAUGES 100
  - TOOL FEELER GAUGES 150
  - TOOL FEELER GAUGES 300
- Feeler gauge aset (length 100, 150, 300 mm)



For more informations

This document is the exclusive property of NTN-SNR ROULEMENTS. Any total or partial reproduction hereof without the prior consent of NTN-SNR ROULEMENTS is strictly prohibited. Legal action may be brought against anyone breaching the terms of this paragraph. NTN-SNR ROULEMENTS shall not be held liable for any errors or omissions that may have crept into this document despite the care taken in drafting it. Due to our policy of continuous research and development, we reserve the right to make changes without notice to all or part of the products and specifications mentioned in this document.  
© NTN-SNR ROULEMENTS, international copyright 2020.

